


STANDARD RIG NUMBER & LETTER SIZES AND POSITIONING




UPRIGHT NUMBERS AND LETTERS

T = Thickness = MINIMUM 45mm

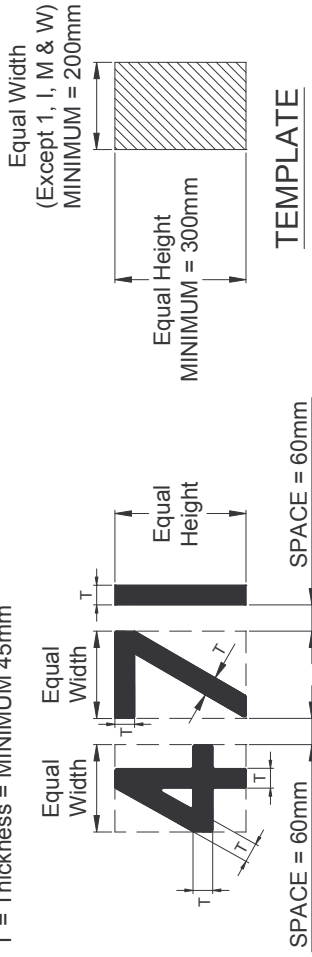

ANGLED NUMBERS AND LETTERS

T = Thickness = MINIMUM 45mm

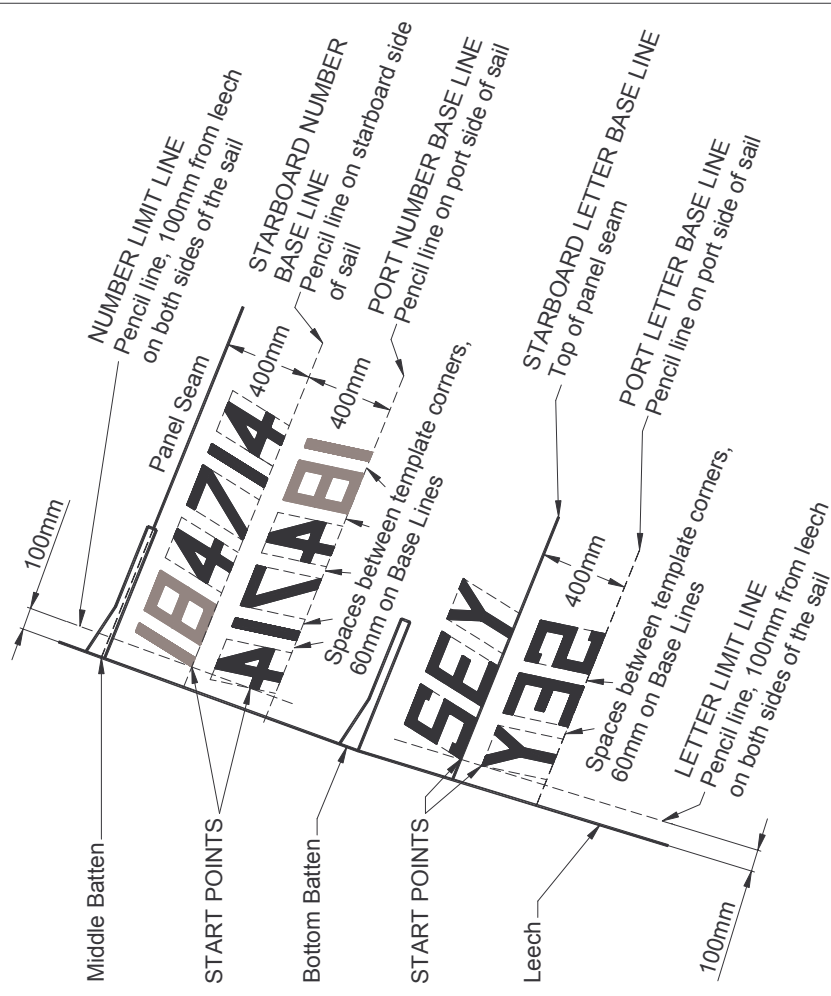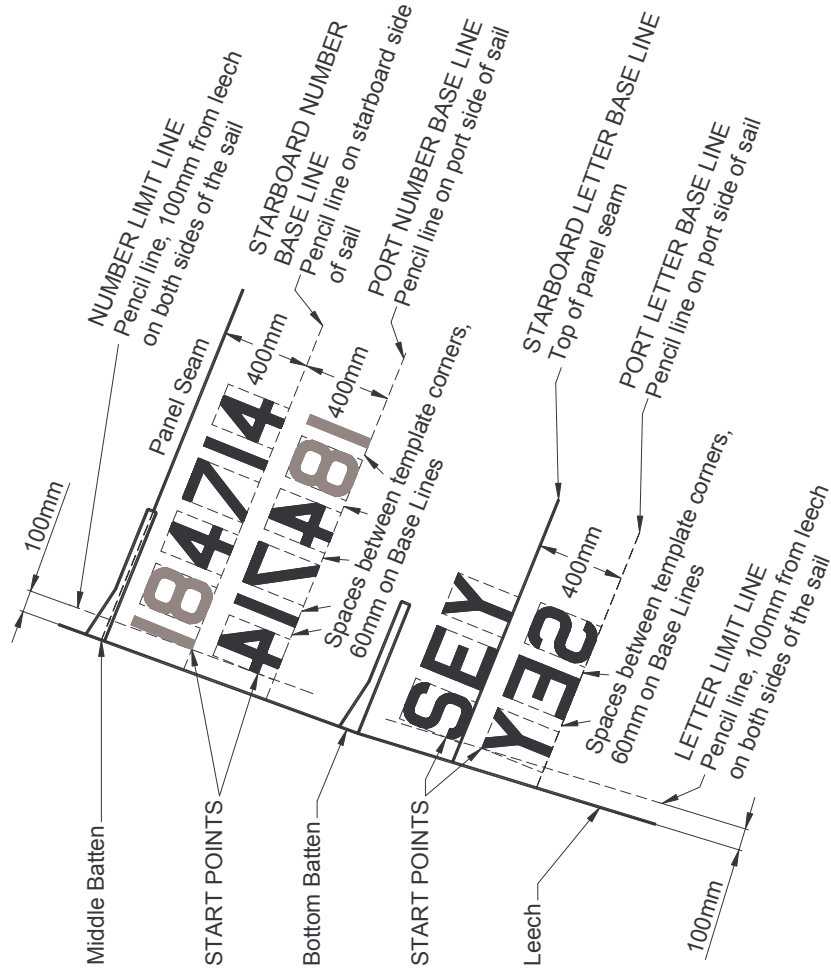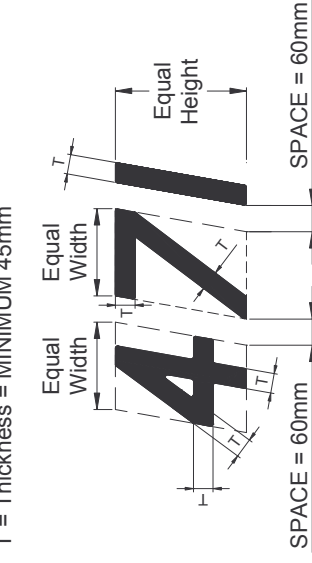

MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 50mm, SO USE 60mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL.